



Model 4050

Manual Pull Stations

CPG Signals  
 2519 4th Avenue, Moline, Illinois 61265  
 P.O. Box 590, Moline, Illinois 61266-0590  
 Phone: (800) 577-5758 Local: (309) 762-0731 Fax: (309) 762-8215



Description

The Model 4050 Fire Alarm Station is made of rigid metal and is finished in red with a red faceplate and raised "FIRE ALARM" lettering. The station can be surface mounted or semi-flush mounted using an optional back box. The 4050 pull station meets ADA requirements for station activation.

Application

Model 4050 manual fire alarm stations are recommended for use in hotels/motels, hospitals, schools, apartments, office buildings, industrial plants, and any other application where manual alarm initiation is required. The station is designed for indoor use. The station's attractive appearance, durable construction, and variety of mounting options allow it to fit most any application.

Specifications

Manual fire alarm stations shall be capable of being surface or semi-flush mounted. When operated, fire stations shall remain

mechanically locked until manually reset. Fire alarm stations shall be constructed of metal with raised lettering and shall have a red finish. Fire alarm stations shall be ADA compliant. Manual fire stations shall be Commercial Products Group Model 4050.

Standard Features

Easy access for inspection permits opening of station without interrupting the fire alarm circuit nor initiating an alarm. Choice of mounting. Surface mounting or semi-flush mounting over backboxes with or without plaster ring. Non-coded. ADA compliant. Indoor use. UL Listed, CSFM, NYC approved.



Optional Features

- 4050 Fire Alarm station is available with switch contact arrangements to meet virtually any fire alarm signaling requirement.
- Surface mount back box.

Ordering Information

Model Number	Part Number	Description
4050 001T	4050 001T	Single Action Pull Station, Red, 4-Wire Pigtails
4050 211T	4050 211T	Single Action Pull Station, Red, Terminals
4050BB	4050BB	Surface Mount Back Box, Red, 1.5" Deep




Model 4050

Manual Pull Stations


Model 4050 Pull Station Specifications			
	Contact Ratings	Dimensions	Weight
4050	6.0A at 24 VDC Resistive Load 3.0A at 24 VDC Inductive Load	5 1/8" H x 3 3/8" W x 1" D	0.80 lbs.
4050BB	N/A	5 1/8" H x 3 3/8" W x 1 1/2" D	0.75 lbs.

**MOUNTING OPTIONS**

**SEMI-FLUSH MOUNTING**

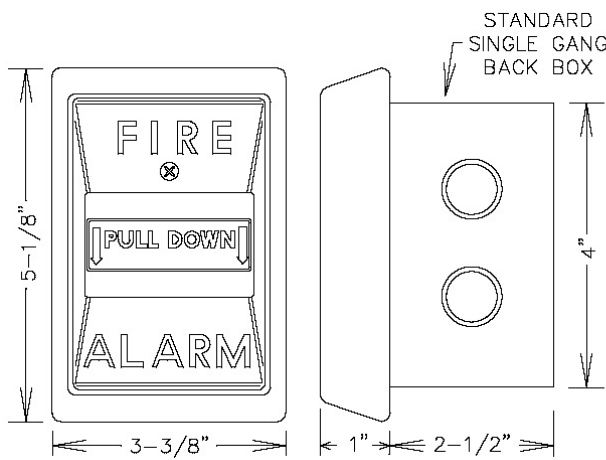

**SURFACE MOUNTING**

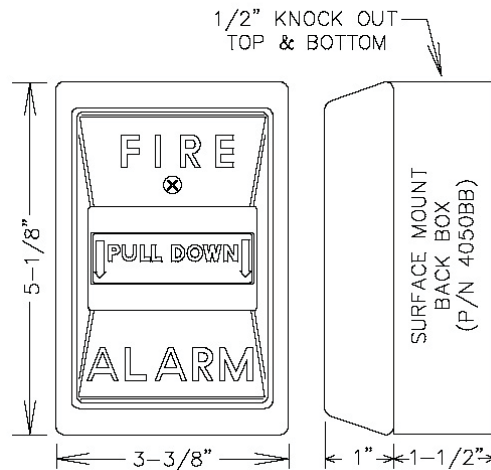

NOTICE: The information contained in this document is intended only as a summary and is subject to change without notice. The devices described in this document have specific instruction sheets which cover various technical, limitation and liability information. Copies of these instruction sheets and the General Product Warning and Limitations Document, which also contains important information are provided with the product and are available from Harrington Signal Inc. Fire Alarm. Information contained in these documents should be consulted before specifying or using the product. For further information or assistance concerning particular problems contact Harrington Signal Inc. Harrington Signal Inc. Fire Alarm reserves the right to change specifications without notice.