

Temporal 3 Coding Module

Model URMT

DESCRIPTION


The URMT is a polarized Temporal 3 Coding module for use on DC and speaker notification appliance circuits. The URMT operates using 12 or 24VDC. The coding module is available in one and two circuit models. The URMT is fail-safe in that if it should drop from the circuit supervision will not be affected and upon alarm all appliances will function in a steady, rather than a Temporal 3, output.

APPLICATION

The URMT can be used in conjunction with any Listed FACP to add Temporal 3 coding to the notification circuit(s) and is ideal for new or retrofit applications.

Model URMT carries the following listings/approvals:

| Agency | Reference Number |
|-------------------------------|------------------|
| Underwriter's Laboratories | S3610 |
| California State Fire Marshal | 7300-1517:121 |

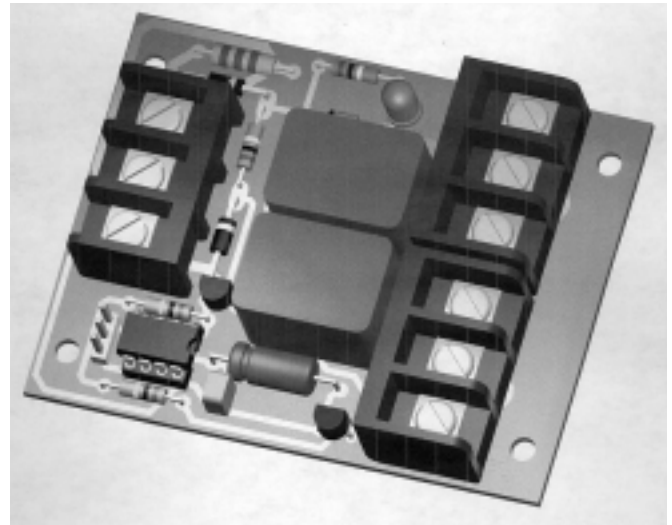


URMT-2 Temporal 3 Coding Module

STANDARD FEATURES

- Add synchronized Temporal 3 coding to most notification appliance circuits.
- Ideal for new and retrofit applications.
- Single and dual circuit models.
- 12 or 24VDC operation.
- Polarized for use on supervised DC or speaker notification circuits.
- Fail-safe, microprocessor based circuit.
- LED to indicate that coil is energized.
- Additional synchronized NAC's can be configured using one URMT as a master with additional URM slave relays.
- UL Listed.

SPECIFICATIONS

| Part Number | Description |
|-------------|--|
| URMT-2 | 2 Circuit, Temporal 3 Coding Module. Input: 12/24VDC Current Draw: 0.056A Contact Ratings: 8A @ 30VDC |
| URMT-1 | 1 Circuit, Temporal 3 Coding Module. Input: 12/24VDC Current Draw: 0.032A Contact Rating: 8A @ 30VDC |

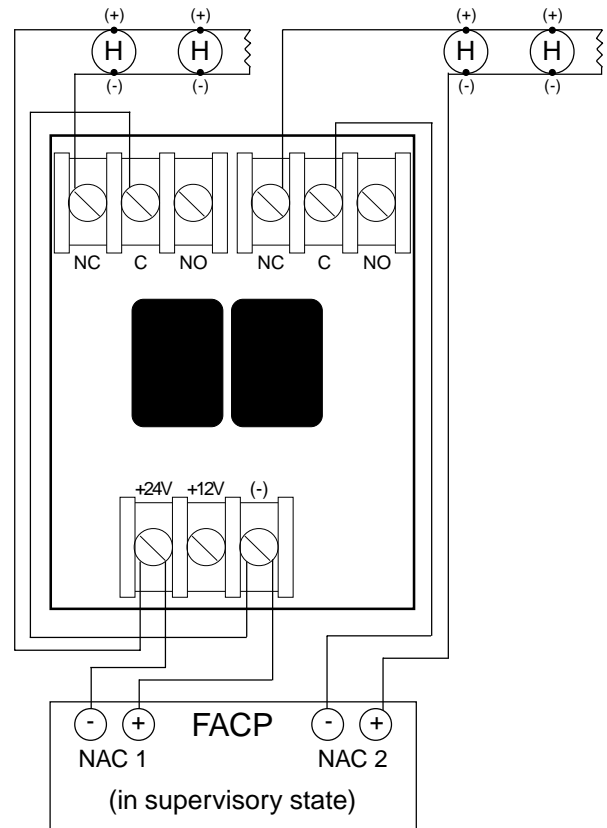

URMT-2 Typical Wiring Hook-up



FL-URMT (09/02)

